


FM Premium Radroom

GXR-40S-B Digital Radiography System

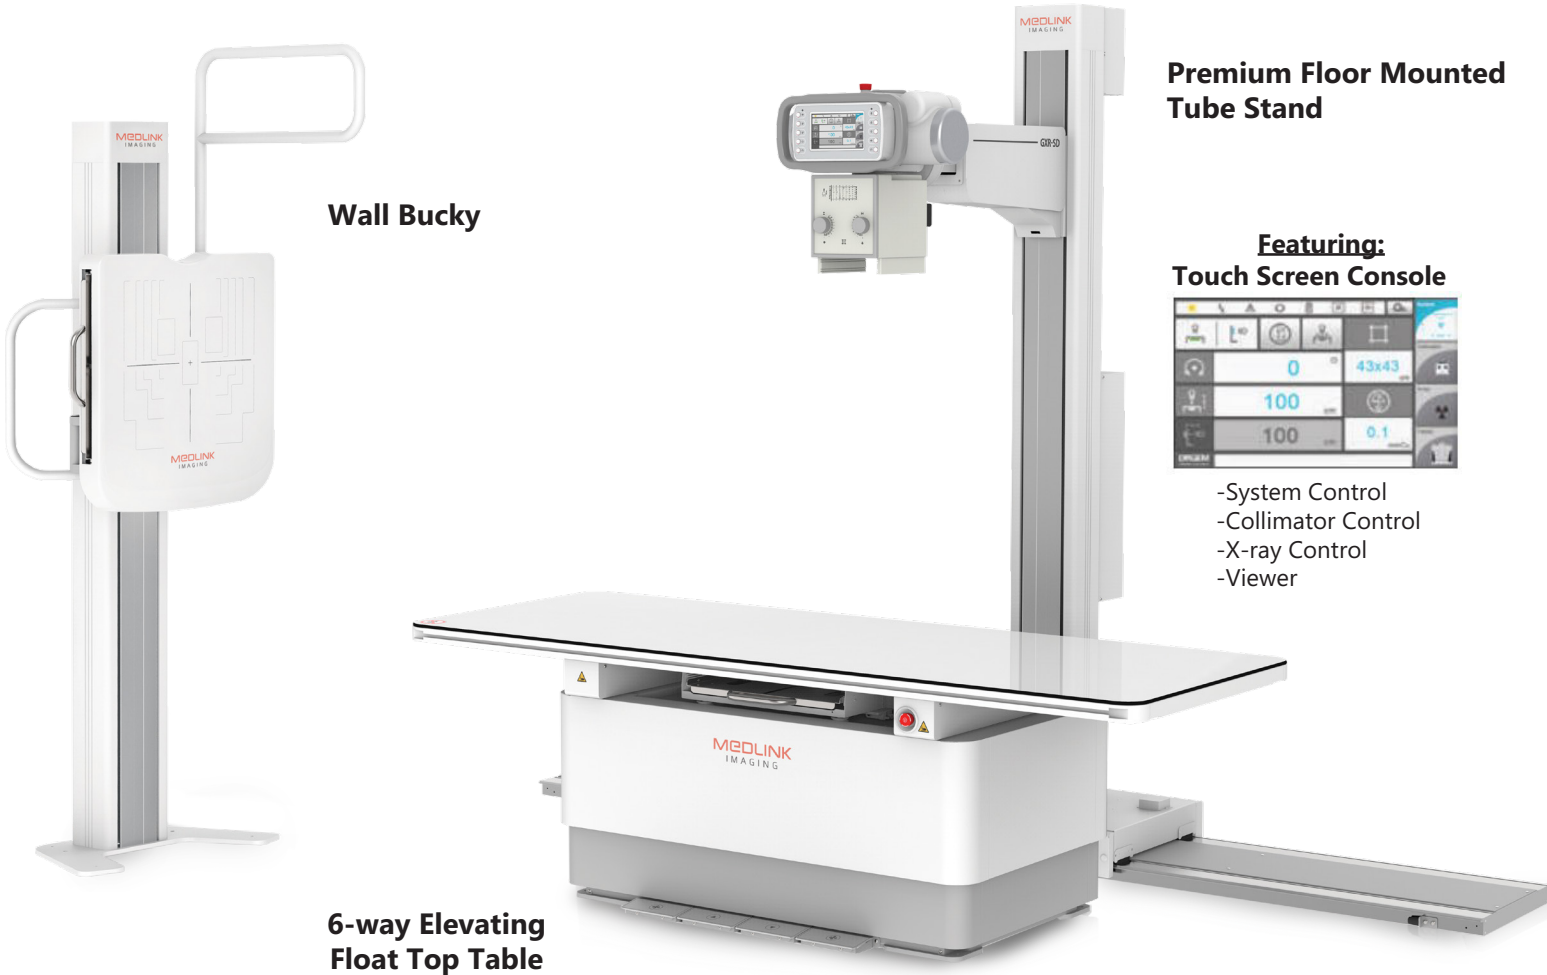


Wall Bucky

**6-way Elevating
Float Top Table**

**Premium Floor Mounted
Tube Stand**

**Featuring:
Touch Screen Console**



- System Control
- Collimator Control
- X-ray Control
- Viewer

Medlink Imaging FM Premium Radroom Digital Radiography System

This state-of-the-art, diagnostic digital radiography system is designed for today's high-volume imaging department. **Medlink's FM Premium Radroom** creates an efficient work flow allowing for an increase in patient throughput, without sacrificing quality or performance. This system features the award winning VIVIX DR flat panel detector (by Vieworks). This Radroom can easily handle routine X-rays, as well as more demanding imaging exams.

- Floor-mounted tube stand with premium functionality including an easy-to-use, visually friendly, touch screen console that lets you effortlessly control the system, collimator, and X-ray systems.
- High frequency X-ray generator with constant potential power output for consistent high quality images.
- The VIVIX DR Panel with the award-winning VXvue acquisition software. This solution utilizes the most advanced imaging processing for the highest quality images.

For more information visit www.medlinkimaging.com/FMpremium

FM Premium Radroom

GXR-40S-B Diagnostic Digital Radiography System

SPECIFICATIONS

Generator

Generator Model: GXR-40

Output Rating: 40kW
Line Frequency: 60Hz
kV Range: 40-125kV, 1 kV step
mA Range: 10 to 500mA
mAs Range: 0.1 to 500mAs
1Ø 230VAC±10% input
Timer Range: 0.001 to 10 sec, 38 steps
Max Power Output: 500mA@50kV
400mA@100kV
320mA@125kV

6-Way Float Top Table

Model: PBT-6 -Premium Table

Motorized cassette tray for tracking with X-ray tube
Tabletop Movement: Longitudinal: 1,000(±500)mm
Transverse(Lateral): 250(±125)mm
Vertical Travel: 300 (550-850)mm
Vertical Speed: 21mm/sec
Vertical Operation: Foot switch
Detector Movement: Longitudinal: 350mm
Tabletop Max Patient Weight: 300kg (660lbs)
Tabletop Size: 2,200(W) x 810(D) x 45(H)mm
Bucky Type: Moving Grid: FD 34-44inch
103 lpi ratio10:1
Lock(Brake): EM Lock, Foot switch on/off
Center indication: Buzzer sound at transverse center
Auto stop at vertical center
Side Cover: 2-story telescopic
Electrical Rating: 100-240VAC, 200VA, 50/60Hz
Dimension: 2,200(W) x 810(D) x 850(H)mm

X-ray Tube and Collimator

Tube Model: DXT-8M

Focal Spot Size: 1.0/2.0mm
Rating(0.1s): 22.5/47kW
Max Anode HU: 140kHU
Collimator Control: Manual or Motorized
Max Field Size: More than 43x43cm(17x17inch)
Max kV: 150kV
Electrical Rating: 24VAC, 6.3A, 50/60Hz
LED Lamp, Manual Tape Measurer and Line Laser, DAP rail
Cable: 8 meters HV cable, Pair

Warranty

System - 5 Year Manufacturer Warranty
DR Panel - 5 Year Manufacturer Warranty

Distributed By:



Floor Mounted Tube Stand

Model: TS-FM6 - Premium

Motorized bucky tracking and Synchronization
3.0 Rail Touch Screen 7" LCD
Tube Rotation Angle: ±180°(Display: ±135°)
Tube Stroke: Longitudinal: Max 2,100mm
Transverse(Lateral): 220mm (Center detent)
Vertical: 1,330mm
(430-1,760mm from floor to focus)
Lock(Brake): EM Lock, Switch on/off
Column Rotation: 90° step, electric or foot push switch
Electrical Rating: 24VDC,3A
Dimension: 2,060(H) x 1,140(D) mm

Vertical Wall Bucky Stand

Model: WBS

Manual Synchronization
Detector Movement: Vertical 1,390mm
420-1,810mm (from floor to Bucky center)
Bucky Type: Moving Grid: 103 lpi, ratio 8:1, 130cm grid
Lock(Brake): EM Lock. Switch on/off
Electrical Rating: 24VDC, 1A
Dimension: Max 1,920(H)x 740(W) x 410(D) mm

DR Flat Panel Detector

Model: VIVIX FXRD-1417

Scintillator: CsI
Pixel Pitch: 140µm
Pixels: 2560 x 3072 pixels
Image Size (HxV): 35.8 cm x 43 cm (14 x 17 in)
Greyscale: 14 bits
Image Acquisition Time: Wired: 2s
Wireless (preview): 2s
Wireless (high res): 4.5s
Weight: 3.3 kg (inc battery)
Battery: Lithium Ion 4000 mAh (4h capturing)

Workstation: Dell Workstation
24" Touchscreen Monitor

Image Acquisition Software: VXvue with PureImpact™
DICOM 3.0 Compliant
Advanced Image Tools
Annotation Tools

Options

- Column rotation control from foot switch to control panel at tube head
- Patient Handgrip, pair, at PBT-6
- P-Type Handgrip at WBS
- Chest Handgrip, pair, at WBS